

Step-By-Step Quick Start Guide To Using Your Generator

1 Remove Generator From Package

2 Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use)
Oil Capacity: 18.5 fluid oz
Because this generator includes Low Oil Shut Off, the generator will not start with low oil. Start out with 18.5 oz, then fill until almost overflowing.)

3 Add Fuel

- If using **Gasoline**, add Unleaded gasoline only octane rating of 87 or higher. Maximum Capacity: 3.9 Gallon gasoline fuel tank. Do Not Use E85 Fuel
- If using **Propane**, connect Regulator Hose to Propane Tank and the LP Gas Inlet on Generator.

4 Start The Generator

- Use the generator **OUTDOORS** in a **WELL VENTILATED AREA**.
- **DO NOT CONNECT** electrical devices until **AFTER** the generator is started.
- Turn Engine Switch to ON
 - A. If using **GASOLINE**, Turn **FUEL PETCOCK** to ON (Figure A)
 - B. If using **PROPANE**, connect Turn Tank Vale to ON (Figure B)
- Adjust the **CHOKE** to **CLOSED/CHOKE** position (Figure C)
- Start the generator manually with the **Recoil (Pull) Start**.
- Once the engine has started, **GRADUALLY** move the choke lever to the **"RUN/OPEN"** position until the engine levels off. Then let the engine run approximately 5 minutes **BEFORE** adding appliances or tools.
- You can now connect electrical devices.



Fuel Petcock (Figure A)



Off



LP Gas Inlet (Figure B)




Closed/Choke



Run/Open

Closed/Choke (Figure C)

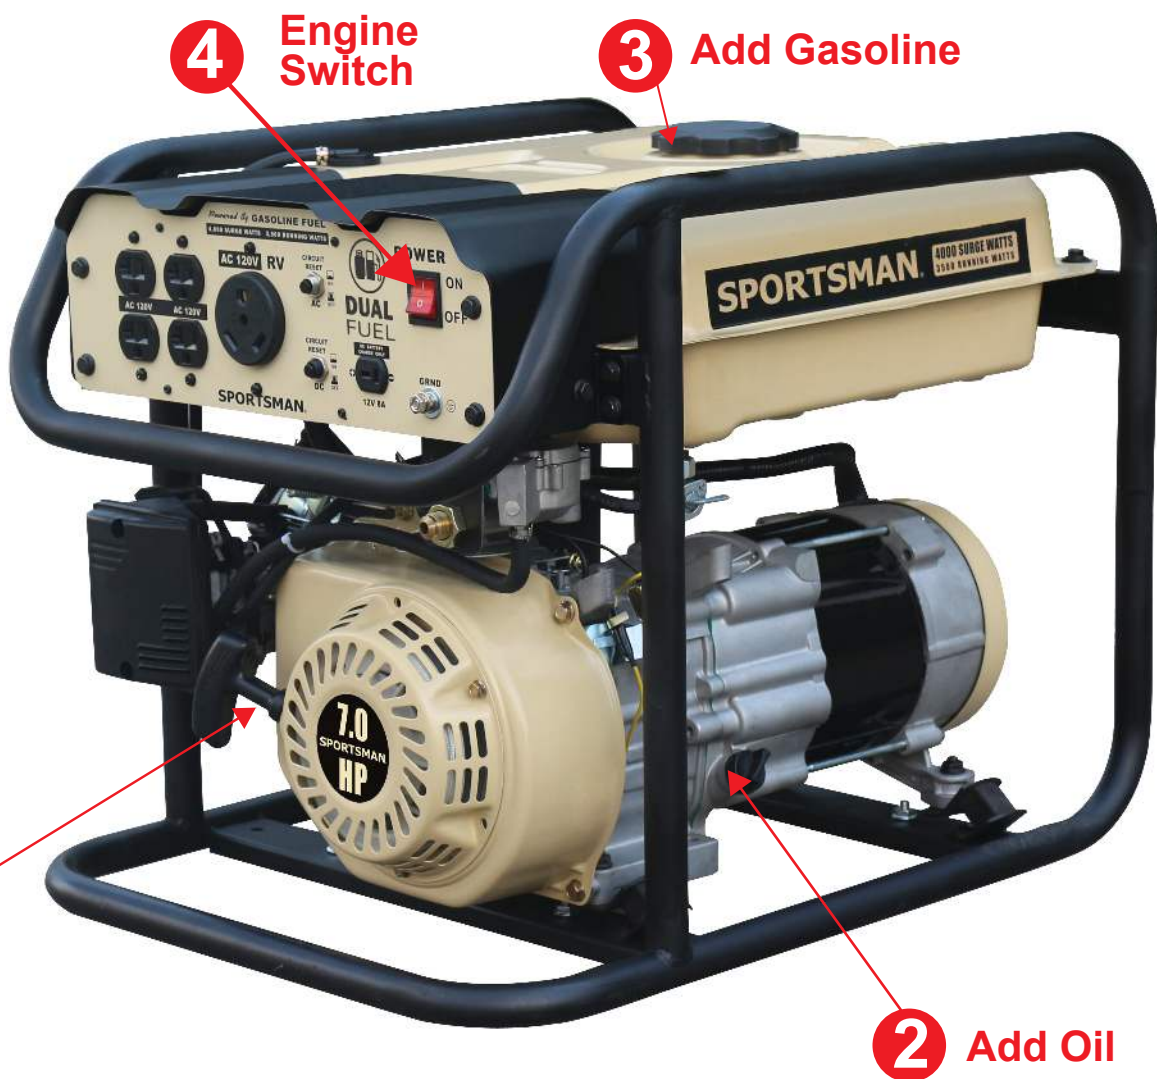

GEN4000DF-SS

4,000 Surge / 3,500 Running Watts

**POWERED BY UNLEADED
GASOLINE OR PROPANE FUEL**

GENERATOR SPECIFICATIONS:

- 7.0 HP Engine, 4 Stroke OHV
- Recoil Start
- 3.9 Gallon Fuel Tank
- Low Oil Shut Off
- AVR Automatic Voltage Regulation
- UL Listed Electrical Components
- Engine Shut Off Switch
- Circuit Breaker & Power Outlets
- 1 - 12V D/C Outlet
- 4 - 120V A/C Outlets
- 1 - 120V RV Outlet
- Complies with EPA emissions
- Run Time : 10 Hours at 50% Load (Gas)
- Run Time : 12 hours @ 50% Load (LPG)
on 20 lbs of LPG Fuel
- Decibel Rating < 69 db @ 0% load
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited
- * SURGE WATTS / RUNNING WATTS
MAY BE REDUCED BY 10% WHEN USING
PROPANE FUEL VS USING GASOLINE.

**OIL IS NOT INCLUDED WITH THIS
GENERATOR. IT IS SOLD SEPARATELY.**

Read and understand instruction manual
before using generator.

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

Need Help? Call Us First!
Monday-Friday 8:00-4:30 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

SPORTSMAN


www.sportsmanseriesbrand.com/generators

QJ

GEN4000DF-SS

4,000 Surge / 3,500 Running Watts

POWERED BY UNLEADED
GASOLINE OR PROPANE FUEL

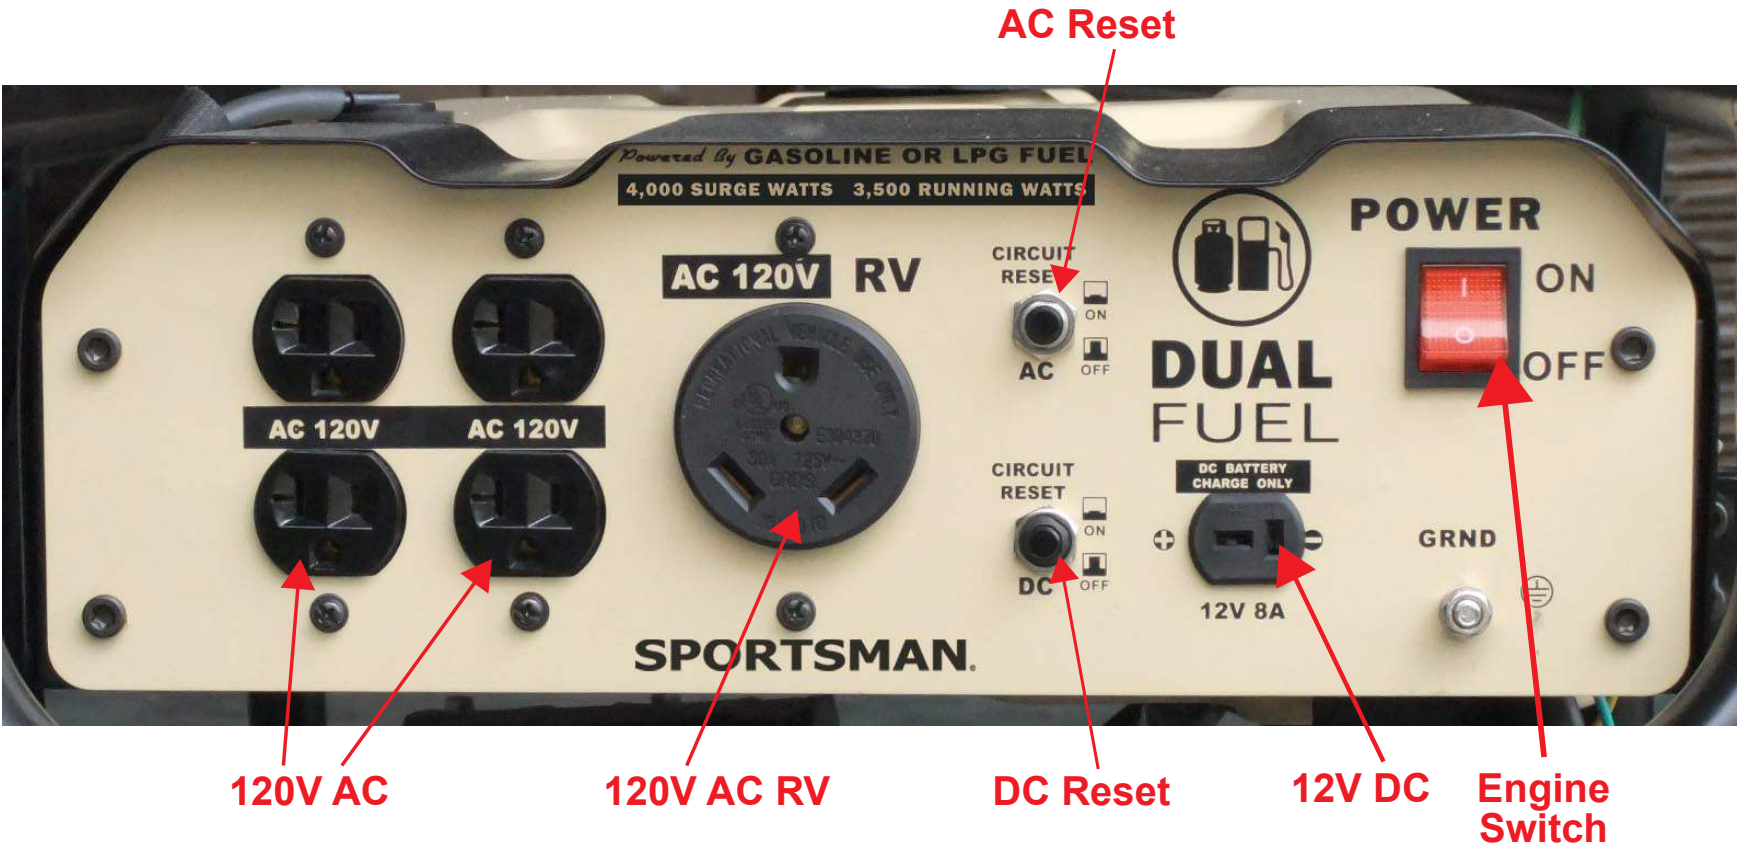

DO NOT CONNECT electrical devices until AFTER the generator is started.

WARNING

**IF THERE IS ANY QUESTION ABOUT A
CONDITION BEING SAFE OR UNSAFE,
DO NOT OPERATE THIS PRODUCT!**

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, EVEN IF the doors and windows are open.

ONLY USE OUTSIDE and far away from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

NOTES

Outlets available on this generator, from left to right:

- 1 x 12 Volt D/C Outlet
- 4 x 120 Volt A/C Outlets
- 1 x 120 Volt RV Outlet

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

Need Help? Call Us First!
Monday-Friday 8:00-4:30 Central Time

Visit our website for Troubleshooting & Frequently Asked Questions

SPORTSMAN

www.sportsmanseriesbrand.com/generators