

KAYAKT

Kayak / Canoe Cart Assembly Instructions



READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT

This manual provides important information on proper operation & maintenance. Every effort has been made to ensure the accuracy of this manual. These instructions are not meant to cover every possible condition and situation that may occur. We reserve the right to change this product at any time without prior notice.

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

DO NOT RETURN THIS PRODUCT TO THE RETAILER

If you experience a problem, have questions or need parts for this product, call Customer Service at 1-636-532-9888, Monday-Friday, 8 AM - 4 PM Central Time. A copy of the sales receipt is required.

FOR CONSUMER USE ONLY – NOT FOR PROFESSIONAL USE.

KEEP THIS MANUAL, SALES RECEIPT & APPLICABLE WARRANTY FOR FUTURE REFERENCE.


- 30 PSI tire pressure
- Detachable 10" pneumatic wheels
- Aluminum collapsible frame
- Marine grade anodized after fabrication
- Rubber bumpers to protect canone/kayak
- Max Capacity 110 Lbs
- 2 pieces CAM Buckle tie-down straps 13.25 Feet (1" wide)
- Measures 16.5" H x 26.5"W x 17.5" D
- Dolly breaks down for easy storage
- Double kick stand

PARTS LIST: (2) WHEELS (2) AXEL PINS (2) PLASTIC CAPS (1) FOLDABLE FRAME (2) STRAPS

NOTE: (2) FOOT CAPS ARE ALREADY ATTACHED

Kayak / Canoe Cart Assembly Instructions

1) Identify all parts

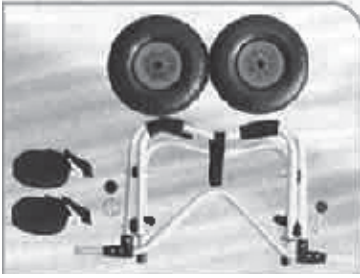

2) Unfold cart



3) Slide wheel onto axel



4) Press plastic axel cap



5) Insert axel pin



6) Repeat on other wheel



Loading Technique

1. Extend kickstand
2. Place boat on cart with mid-point of hull slightly forward from the cross bars
3. Strap boat to cart as illustrated
4. Retract kickstand before rolling



WARNING

30 PSI tire pressure
Max Capacity 110 Lbs