

MCDSG

Double Seat Glider Chair



⚠ WARNING!

Maximum Weight Capacity Is 400 lbs

READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT.

This manual provides important information on proper operation & maintenance. Every effort has been made to ensure the accuracy of this manual. These instructions are not meant to cover every possible condition and situation that may occur. We reserve the right to change this product at any time without prior notice.

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

QUESTIONS OR PROBLEMS? CONTACT CUSTOMER SERVICE FIRST.

If you experience a problem, have questions or need parts for this product, call Customer Service at 1-636-532-9888, Monday-Friday, 8 AM - 4 PM Central Time. A copy of the sales receipt is required.

FOR CONSUMER USE ONLY – NOT FOR PROFESSIONAL USE.

KEEP THIS MANUAL, SALES RECEIPT & APPLICABLE WARRANTY FOR FUTURE REFERENCE.

⚠ WARNING

Unpack product from package and review contents. Keep all packaging until product has been reviewed. This product should be inspected prior to use to make certain all parts are intact and safe to use after assembly.

Never allow children to use this product without responsible adult supervision.

Some chemicals can damage the finish on the product. Do not use harsh chemicals such as alcohol, ammonia, gasoline, carbon tetrachloride, paint thinner, etc. to clean this product. Use soap and water.

Locate all parts before assembly. Two adults may be required for assembly. During assembly, position on soft carpet or non-abrasive surface to avoid damage to the chair. Do not tighten screws until assembly is complete.

After assembly: Regularly check all bolts and tighten any that are loose.

Tools Required: 4mm Hex Wrench, Phillips Screw Driver, 10mm Combination Wrench

COMPONENTS



A) Acorn Nut - 29 Pieces



B) Short Screw - 10 pieces



C) Plastic Spacer - 4 pieces



D) Long Screw - 19 pieces



E) Large Washer - 16 pieces



F) Lock Nuts - 29 pieces



G) Small Washer - 62 pieces



H) Small End Cap - 2 pieces



1) Main Frame - 2 pieces



2) Short Frame Crossbar - 1 piece



3) Side Support - 2 pieces




4) Chair Frame Crossbar - 1 piece




5) Long Frame Crossbar - 1 piece



6) Swing Arms - 4 pieces

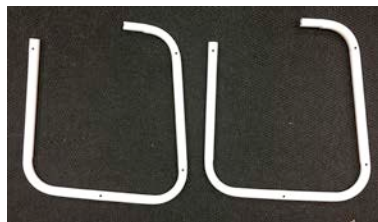

7) Chair Frame Arm - 2 pieces



8) Chair Back - 2 pieces



9) Chair Seat - 2 pieces



10) Small Support - 1 piece



11) Hex Wrench - 1 piece




12) Wrench - 1 piece




13) Large End Cap - 2 pieces


ASSEMBLY

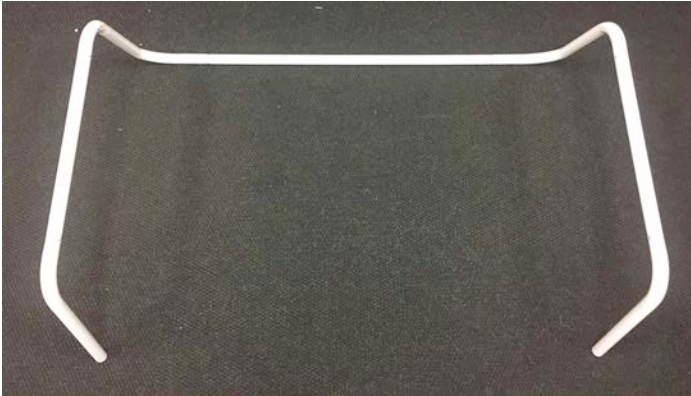

1) Connect Main Frame #1 & Short Frame Crossbar #2. Insert the Large End Cap #13 for Feet. Use Long Screw + Small Washer + Frame + Small Washer + Lock Nut.

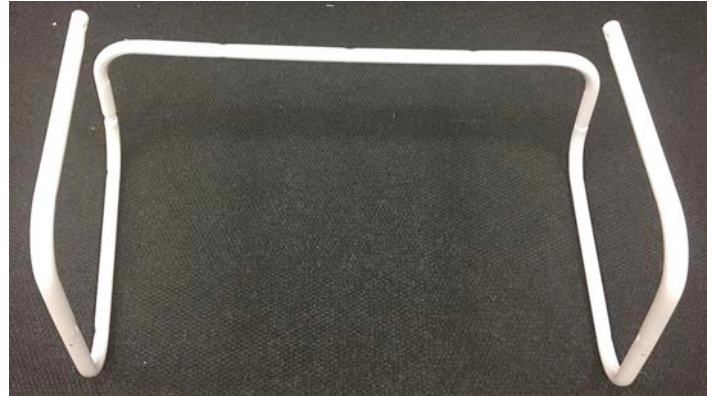

2) Connect Chair Frame Arm #7 and Chair Frame Crossbar #4 by firmly pressing the kinked end into the open end. Insert Small End Cap #H into Chair Frame.

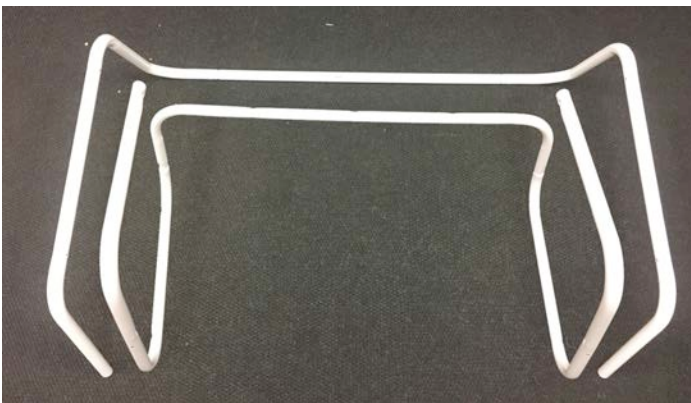

3) Place the Chair Frame inside the Main Frame.



4) Locate the Swing Arm pieces. Connect Main Frame #1 & Chair Frame Arm #7. Use Long Screw + Small Washer + Frame + Small Washer + Lock Nut.



(NOTE) Make sure the Swing Arm is placed at top on INSIDE. But on bottom it is on OUTSIDE. Also, make sure the shape of the Swing Arm is pointed toward the INSIDE, but at bottom it is pointed toward the outside. Use Long Screws. **At top make sure a Plastic Spacer is used between Main Frame and Swing Arm.** (Later, when assembly is complete, an Acorn Nut #A will be added on top of the Lock Nut.)

5) Attach Long Frame Crossbar #5 using Long Screw + Small Washer + Lock Nut.





6) Combine the Chair Back and Chair Seat by using 4 pieces Short Screws + Small Washer

7) Combine the two Chairs by adding a Short Screw + Small Washer + Lock Nut in the middle of the Chair Seat. Insert the Small Support #10 between the two Chair Backs using Short Screw + Small Washer + Lock Nut.



8) Attach the combined Chairs to the Chair Frame Arm, at the side of the Chair Back and the Chair Seat using Long Screw + Small Washer + Lock Nut.



9) Add the Side Support #3 to the Chair Backs and the Chair Frame Crossbar with Long Screw + Small Washer + Lock Nut.



10) Attach the Small Support #10 between the two Chair Backs to the Chair Frame Crossbar using Short Screw + Small Washer + Lock Nut.

Before use, make sure all nuts are securely tightened.

(Factory may have included extra washers and nuts)

